
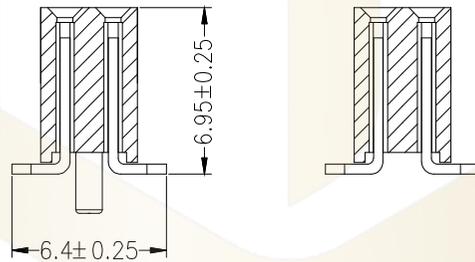
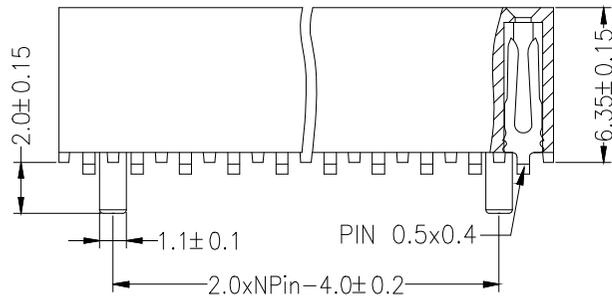
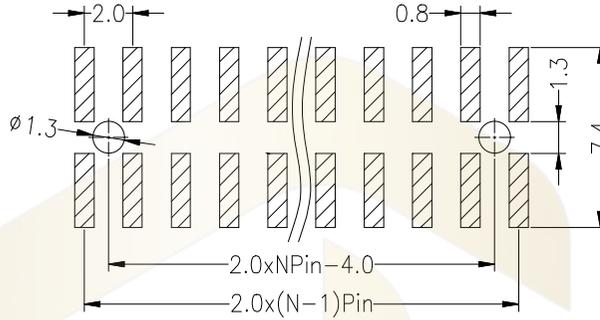


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

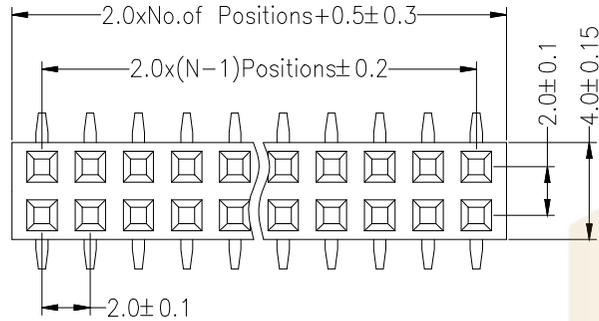

P=With Post

默认=W/O Post

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩMax
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5-10 seconds)

Ordering Information

PM 200 - * - N - S - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
2=贴片
8=穿孔
S=立贴
S=立贴
S=立贴

Length (Pitch)
G0:Gold
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Contact Plating

Post (带柱)

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK					
			X. X	±0.30	批准 APPROVAL		产品名称 TITLE	2.00双排 排母 贴片 (塑高6.35)	版本 REV.	A
1			初版发行		比例 SCALE		产品料号 PART NO.	PM200-2-N-S-6.35-XX(L6.95)	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection		材料 MATERIAL		页次 SHEET	1/1