
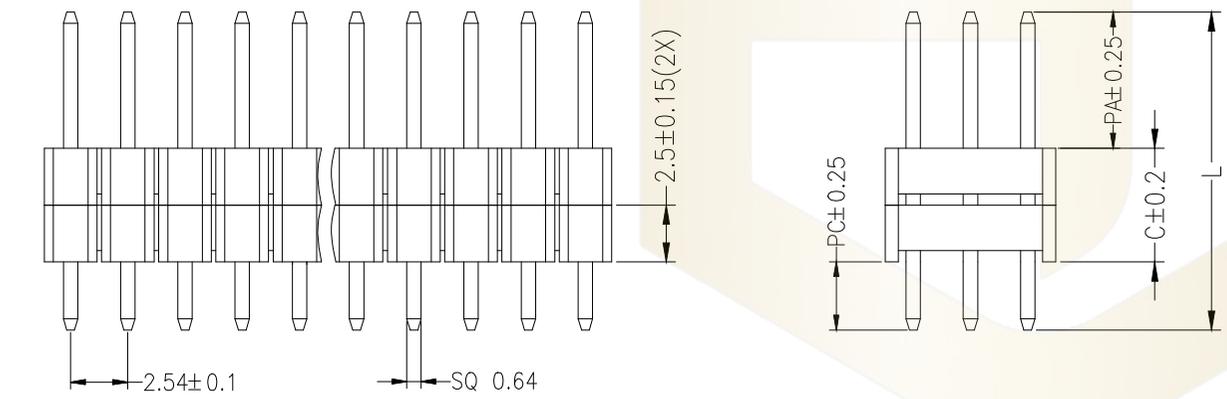


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩMax
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩMin
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

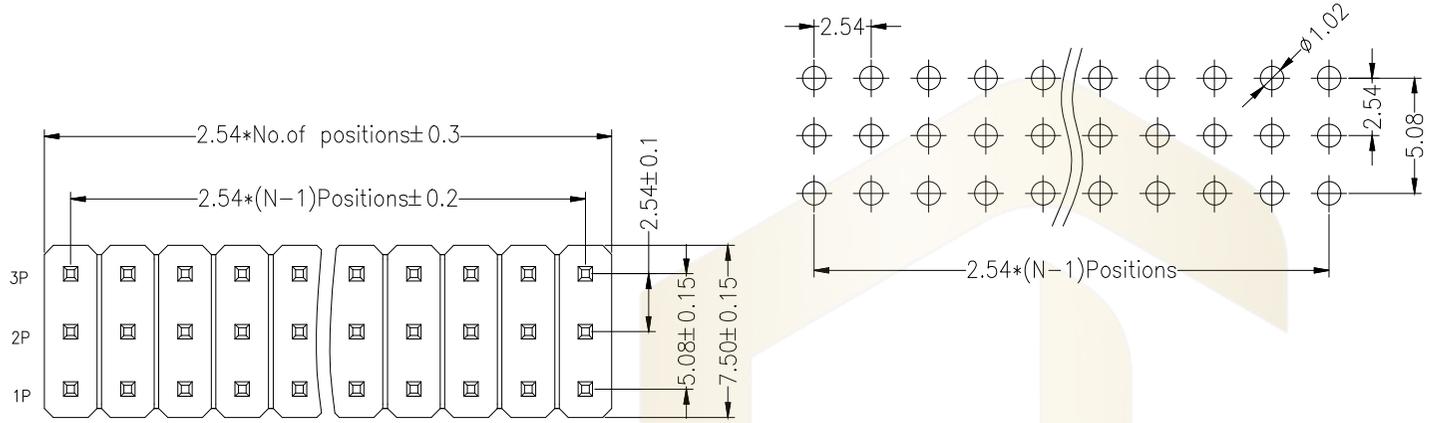

ITEM	PA	PC	C	L
Standard	6.00	3.00	5.00	14.00
Alternate				

Ordering Information

PZ 254 - * - N - Z - * - ** - DP

No. of Rows 1=Single Row 2=Double Row 3=Triple Row	No. of Pins 02-40Pin	Type 直排针 半排针 双排针	Length (产品长度)	Contact Plating C0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Dual Plastic (双塑)
---	-------------------------	---------------------------	------------------	--	----------------------

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.54 三排 双塑 直排针	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PZ254-3-N-Z-C5.0-XX-DP (L14.0)	单位 UNITS	mm
			X.XX ±0.20	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10					
1	初版发行		Angle ±3.0°					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						