
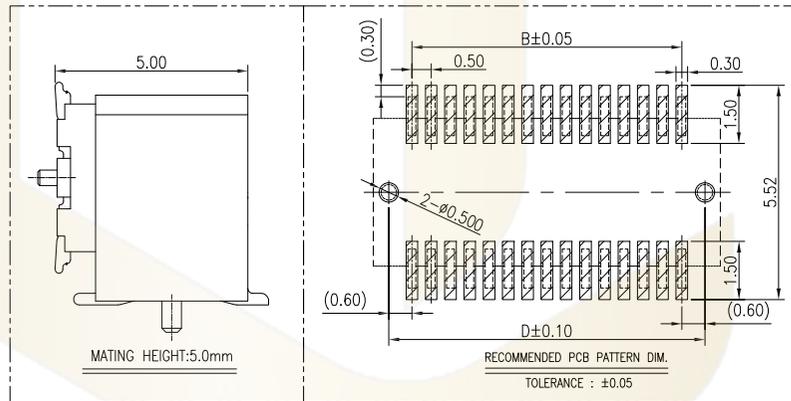
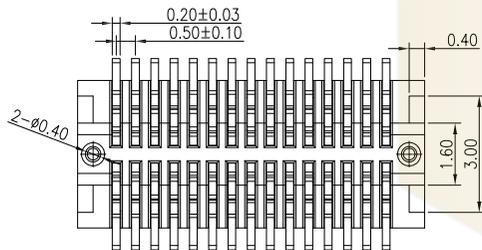



3D VIEW

- NOTES:
 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94-0
 COLOR:BEIGE.
 2.TERMINAL: PHOSPHOR BRONZE PLATING: 1 μ" GOLD FLASH
 OVERALL 50~100 μ" NICKEL UNDER PLATED.
 3.VOLTAGE RATING: 60V AC/DC
 4.CURRENT RATING: 0.5A MAX AC/DC
 5.OPERATING TEMPERATURE: -25°C TO +85°C
 6.CONTACT RESISTANCE: 60mΩ MAX
 7.INSULATION RESISTANCE: 800MΩ MIN

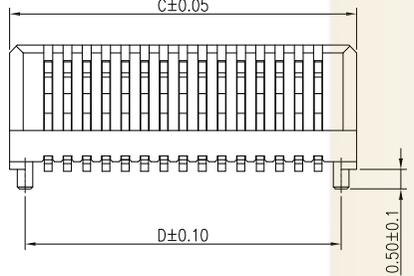

NO.of contacts	Dimensions			
	A.	B.	C.	D.
4	2.50	0.50	2.50	1.70
6	3.00	1.00	3.00	2.20
8	3.50	1.50	3.50	2.70
10	4.00	2.00	4.00	3.20
12	4.50	2.50	4.50	3.70
14	5.00	3.00	5.00	4.20
16	5.50	3.50	5.50	4.70
18	6.00	4.00	6.00	5.20
20	6.50	4.50	6.50	5.70
22	7.00	5.00	7.00	6.20
24	7.50	5.50	7.50	6.70
26	8.00	6.00	8.00	7.20
28	8.50	6.50	8.50	7.70
30	9.00	7.00	9.00	8.20
32	9.50	7.50	9.50	8.70
34	10.00	8.00	10.00	9.20
36	10.50	8.50	10.50	9.70
38	11.00	9.00	11.00	10.20
40	11.50	9.50	11.50	10.70
42	12.00	10.00	12.00	11.20
44	12.50	10.50	12.50	11.70
46	13.00	11.00	13.00	12.20
48	13.50	11.50	13.50	12.70
50	14.00	12.00	14.00	13.20
52	14.50	12.50	14.50	13.70
60	16.50	14.50	16.50	15.70
70	19.00	17.00	19.00	18.20
80	21.50	19.50	21.50	20.70

Ordering Information

HC-PBB 05 - * - N - * - * - H* - ** - R - P - 06

PITCH: 05=0.5mm, 08=0.8mm
 1= 05槽, 2= 08槽
 No of Pins: 04P~80P
 OUP=80P, F=Female
 04= 4Pin, 06= 6Pin
 Nature: 0=直插, 1=侧插
 Male/Female TYPE (05/08)
 Plastic Height: H3.25~12mm
 Contact Plating: G111" Gold
 R=Reel, P=Post

		GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司			
		DIM TOL	审核	ShenzhenhuacantianluELECTRONICS CO., LTD			
		X.X ±0.30	批准	产品名称	BTB 0.5 单槽 公座 立式侧插	版本	A
		X.XX ±0.20	比例	TITLE	座高3.25mm 编带 带柱	REV.	
		X.XXX ±0.10	投影	产品料号	HC-PBB05-1-N-M-S-H3.25-XX-R-P-06	单位	mm
序号	变更内容	日期	投影	PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE	Projection	MATERIAL		SHEET	