
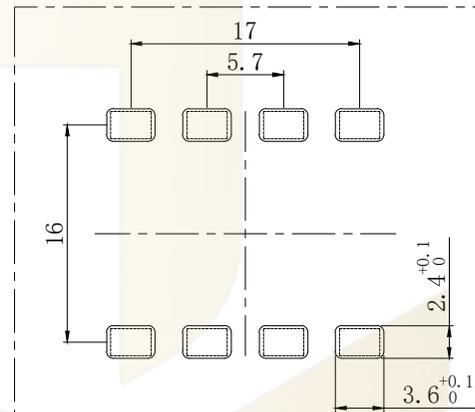
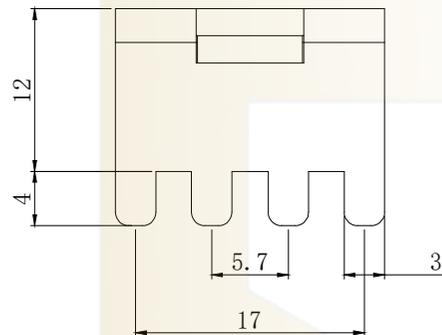


NOTES:

备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M6
压线螺孔M6
3. Current Rating: 180A
额定电流: 180A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

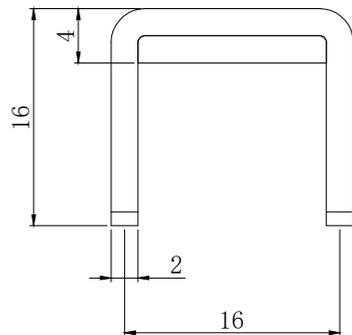

PCB 参考安装方式

Ordering Information

HC	-	*	**	*	-	****	-	*	****	*	-	07
Type	Thickness	Screw Thread	Welding Feet	Series	D=H/F	Product No.	Material					
8-Full Teeth (插穿)	08-0.8mm	M6 (螺牙)	2-63 (焊脚)	0808-0808mm	0=H/F	产品序号	黄铜 (黄铜)					
8-Wire Net (网母)	10-1.0mm	M6 (螺牙)	2-63 (焊脚)	1020-1020mm	S=H/F		紫铜 (紫铜)					
8-Wire Gasket (网垫片)	12-1.2mm	M6 (螺牙)	2-63 (焊脚)	FD=Flag		紫铜 (紫铜)					
	15-1.5mm	M6 (螺牙)	4-4 (焊脚)									
	20-2.0mm	M6 (螺牙)	4-4 (焊脚)									
	25-2.5mm	M6 (螺牙)	4-4 (焊脚)									
	30-3.0mm	M6 (螺牙)	4-4 (焊脚)									
	32-3.2mm	M6 (螺牙)	4-4 (焊脚)									

			GENEAL TOLERANCE	制图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核					
			5 or more ±0.35	批准		产品名称	PCB 焊接端子 厚度2.0 插板 铆垫片	版本	A
			2~5 ±0.25	比例		TITLE	M6 8焊脚 18x20x16mm	REV.	
			0~2 ±0.15	SCALE		产品料号	HC-RG2068-1820-D906-07	单位	mm
1	初版发行		Angle ±3.0°	投影		PART NO.		页次	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE				MATERIAL		SHEET	