
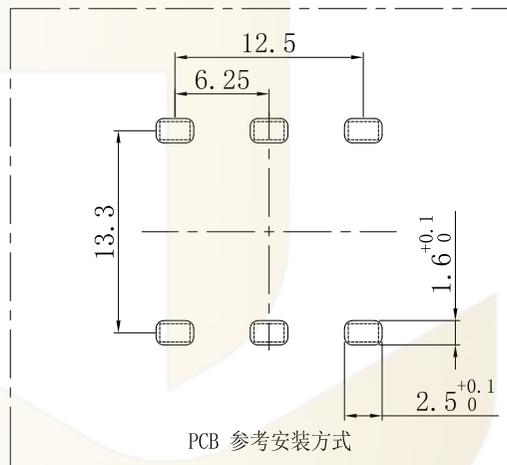
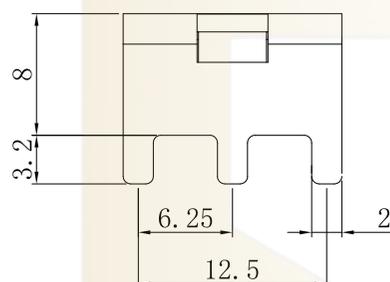


NOTES:
备注


1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M5
压线螺孔M5
3. Current Rating: 70A
额定电流: 70A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * * * * - * * * * - * * * * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Product No.	Material
插板 (插脚)	0.4mm	M5 (螺牙)	1.2mm (焊脚)	14.5x14.5x11.2mm	HC-RG1256-1414-D522-07	黄铜 (镀锡)
螺母 (螺帽)	0.4mm	M5 (螺牙)	1.2mm (焊脚)	14.5x14.5x11.2mm	HC-RG1256-1414-D522-07	黄铜 (镀锡)
螺帽 (螺帽)	0.4mm	M5 (螺牙)	1.2mm (焊脚)	14.5x14.5x11.2mm	HC-RG1256-1414-D522-07	黄铜 (镀锡)
螺帽 (螺帽)	0.4mm	M5 (螺牙)	1.2mm (焊脚)	14.5x14.5x11.2mm	HC-RG1256-1414-D522-07	黄铜 (镀锡)



		GENEAL TOLERANCE		制图	07		
		DIM	TOL	审核			
		5 or more	±0.35	批准	产品名称 PCB 焊接端子 厚度1.2 插板 铆垫片		
		2~5	±0.25	比例	M5 6焊脚 14.5x14.5x11.2mm		
		0~2	±0.15	投影	版本 REV. A		
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	材料 MATERIAL	产品料号 PART NO.	HC-RG1256-1414-D522-07	单位 UNITS mm
				深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD	页次 SHEET	1/1	