


- NOTES:
备注
1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
 2. Wire screw hole M5
压线螺孔M5
 3. Current Rating: 100A
额定电流:100A
 4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
 5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

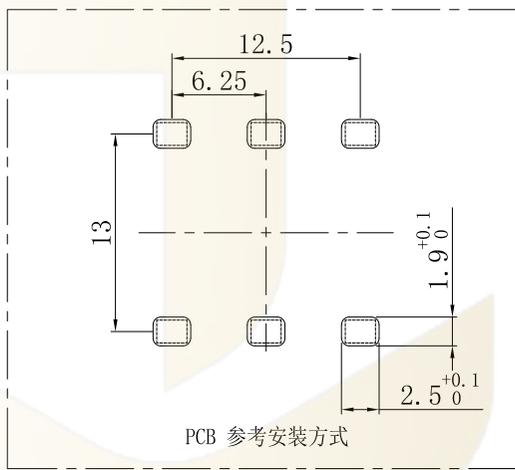

Ordering Information

HC - * * * * - * * * * - * * * * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Product No.	Material
插板 (插板)	0.4mm	M5 (螺牙)	100° (焊脚)	100°/6x20mm	HC-RG1556-1414-D709-07	黄铜 (紫铜)
螺母 (螺母)	0.4mm	M5 (螺牙)	100° (焊脚)	100°/6x20mm	HC-RG1556-1414-D709-07	黄铜 (紫铜)
螺柱 (螺柱)	0.4mm	M5 (螺牙)	100° (焊脚)	100°/6x20mm	HC-RG1556-1414-D709-07	黄铜 (紫铜)
螺帽 (螺帽)	0.4mm	M5 (螺牙)	100° (焊脚)	100°/6x20mm	HC-RG1556-1414-D709-07	黄铜 (紫铜)
螺柱 (螺柱)	0.4mm	M5 (螺牙)	100° (焊脚)	100°/6x20mm	HC-RG1556-1414-D709-07	黄铜 (紫铜)

		GENEAL TOLERANCE		制图	07		
		DIM	TOL	审核			
		5 or more	±0.35	批准			
		2~5	±0.25	比例			
		0~2	±0.15	投影			
		Angle	±3.0°	投影			
1	初版发行	日期		深圳市华灿天禄电子有限公司			
序号	变更内容	日期		ShenzhenhuacantianluELECTRONICS CO., LTD			
No.	MODIFY CONTENT	MODIFY DATE		产品名称	PCB 焊接端子 厚度1.5 插板 铜垫片	版本	A
				TITLE	M5 6脚脚 14.5x14.5x16mm	REV.	
				产品料号	HC-RG1556-1414-D709-07	单位	mm
				PART NO.		页次	1/1
				MATERIAL		SHEET	