

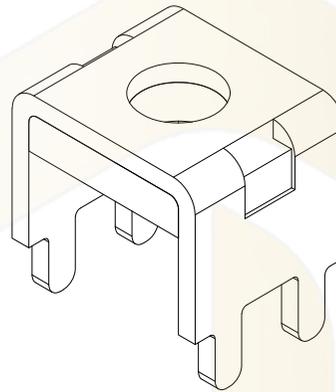
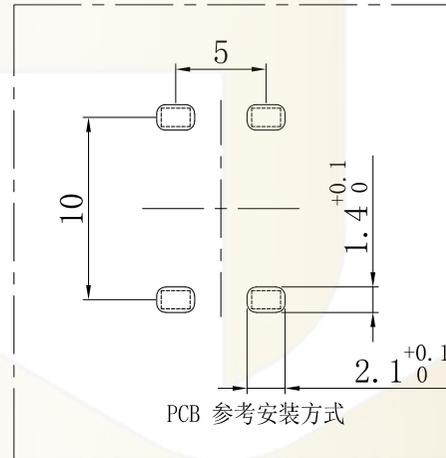


M4



NOTES:
备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 60A
额定电流: 60A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/Pin	Product No.	Material
Pin (插脚)	0.8±0.05mm	M3 (螺牙)	2个	1620#16x20mm	Pin		Brass (黄铜)
Pin Nut (螺母)	1.0±0.05mm	M3 (螺牙)	2个	Pin		Brass (黄铜)
Pin Gasket (垫片)	1.5±0.05mm	M3 (螺牙)	4个		Dip		Brass (黄铜)
Pin Gasket (垫片)	2.0±0.05mm	M3 (螺牙)	6个				Brass (黄铜)
Pin Gasket (垫片)	2.5±0.05mm	M3 (螺牙)	8个				Brass (黄铜)
Pin Gasket (垫片)	3.0±0.05mm	M3 (螺牙)				Brass (黄铜)

			GENREL TOLERANCE	制图	07			深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD		
			DIM TOL	审核				产品名称 TITLE PCB 焊接端子 厚度1.0 插板 铆垫片 M4 4焊脚 11x9x13.2mm		
			5 or more ±0.35	批准				版本号 REV. A		
			2~5 ±0.25	比例				产品料号 PART NO. HC-RG1044-1109-D318-07		
			0~2 ±0.15	投影				单位 UNITS mm		
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	材料	MATERIAL			页次 SHEET 1/1		