


- NOTES:
备注
1. Brass or purple copper, Bright tin-plating
黄铜或紫铜，镀亮锡
 2. Wire screw hole M4
压线螺孔M4
 3. Current Rating: 70A
额定电流:70A
 4. There shall be no defects such as pin deformation and burrs.
不得有脚变形，毛刺等缺陷
 5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Model	Product No.	Material
Pin (插针)	0.8±0.05mm	0.8 (螺牙)	2个	010108/8mm	Model	产品序号	镀锡铜 (黄铜)
Wire Screw Nut (螺螺母)	1.0±0.05mm	1.0 (螺牙)	2个	1620#16x20mm	Pin	产品序号	镀锡铜 (黄铜)
Wire Screw Gasket (螺垫片)	1.5±0.05mm	1.5 (螺牙)	4个	Pin	产品序号	镀锡铜 (黄铜)
	2.0±0.05mm	2.0 (螺牙)	6个				
	2.5±0.05mm	2.5 (螺牙)	8个				
	3.0±0.05mm	3.0 (螺牙)				

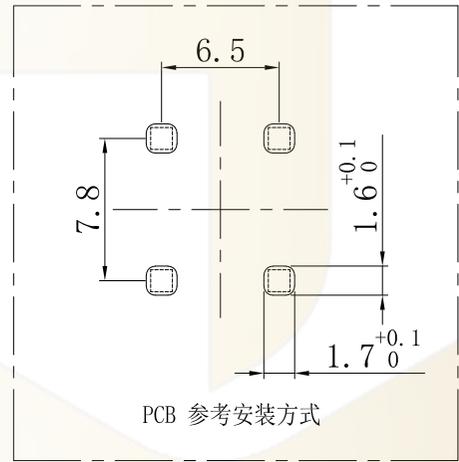

			GENERAL TOLERANCE	制图	07			深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueLECTRONICS CO., LTD		
			DIM TOL	审核						
			5 or more ±0.35	批准	产品名称			PCB 焊接端子 厚度1.2 插板 铆垫片	版本	A
			2~5 ±0.25	APPROVAL	TITLE			M4 4焊脚 9x9x9.5mm	REV.	
			0~2 ±0.15	比例	PART NO.			HC-RG1244-0909-D501-07	单位	mm
序号	变更内容	日期	Angle ±3.0°	投影	MATERIAL			材料	页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Projection				MATERIAL	SHEET	