
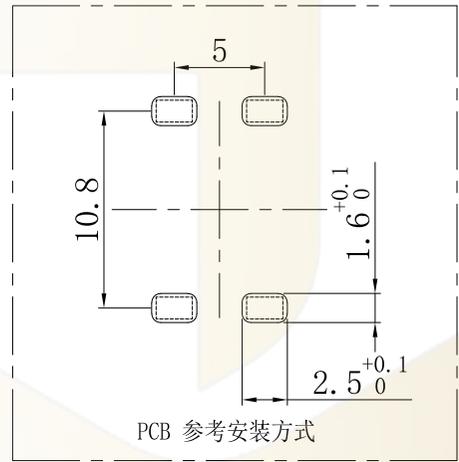



NOTES:

- 备注
1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
 2. Wire screw hole M4
压线螺孔M4
 3. Current Rating: 70A
额定电流: 70A
 4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
 5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

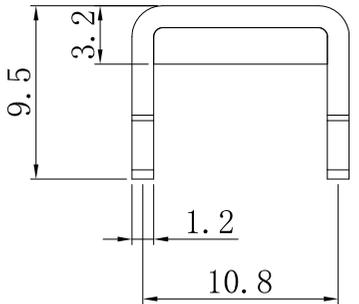

Ordering Information

HC - * ** * - * - * - * - * - * - * - * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Model	Product No.	Material
Pin (插脚)	0.8±0.05mm	M4 (螺牙)	2mm	1620±0.20mm	1620	产品型号	镀锡铜 (黄铜)
Pin Nut (螺母)	1.0±0.05mm	M4 (螺牙)	2mm	1620	产品型号	镀锡铜 (黄铜)
Pin Gasket (垫片)	1.5±0.05mm	M4 (螺牙)	2mm	1620	产品型号	镀锡铜 (黄铜)
Pin Gasket (垫片)	2.0±0.05mm	M4 (螺牙)	2mm	1620	产品型号	镀锡铜 (黄铜)
Pin Gasket (垫片)	2.5±0.05mm	M4 (螺牙)	2mm	1620	产品型号	镀锡铜 (黄铜)
Pin Gasket (垫片)	3.0±0.05mm	M4 (螺牙)	2mm	1620	产品型号	镀锡铜 (黄铜)

			GENERAL TOLERANCE	制图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核		产品名称	PCB 焊接端子 厚度1.2 插板 铆垫片	版本	A
			5 or more ±0.35	CHECK		TITLE	M4 4焊脚 12x9x9.5mm	REV.	
			2~5 ±0.25	批准		产品料号	HC-RG1244-1209-D511-07	单位	mm
			0~2 ±0.15	APPROVAL		PART NO.		页次	1/1
序号	变更内容	日期	Angle ±3.0°	投影		材料		SHEET	
No.	MODIFY CONTENT	MODIFY DATE		Projection		MATERIAL			