
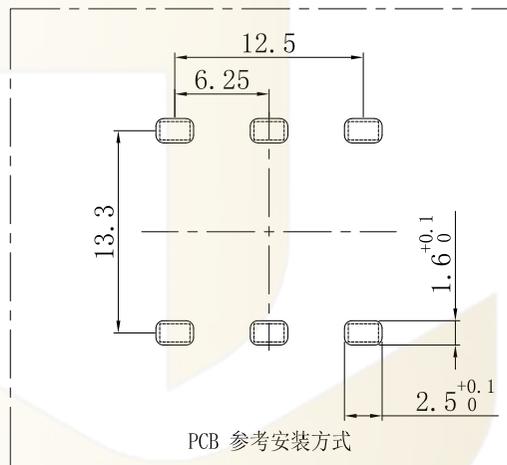
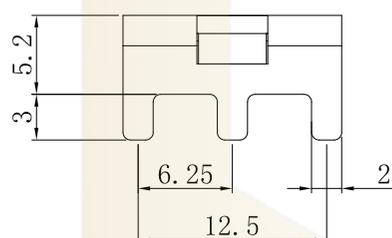


NOTES:

备注


1. Brass or purple copper, Bright tin-plating  
黄铜或紫铜, 镀亮锡
2. Wire screw hole M5  
压线螺孔M5
3. Current Rating: 70A  
额定电流: 70A
4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差



**Ordering Information**

HC - \* \* \* \* - \* \* \* \* - \* \* \* \* - 07

Type	Thickness	Screw	Welding	Series	Part No.	Product No.	Material
插板 (插脚)	0.4mm	M5	锡焊	100	14.5x14.5x8.2mm	HC-RG1256-1414-D520-07	黄铜 (紫铜)
螺母 (螺帽)	0.4mm	M5	锡焊	100	14.5x14.5x8.2mm	HC-RG1256-1414-D520-07	黄铜 (紫铜)
铜垫片 (铜垫圈)	0.4mm	M5	锡焊	100	14.5x14.5x8.2mm	HC-RG1256-1414-D520-07	黄铜 (紫铜)



		GENERAL TOLERANCE		制图	07				
		DIM	TOL	审核					
		5 or more	±0.35	批准					
		2~5	±0.25	比例					
		0~2	±0.15	投影					
序号	变更内容	日期		深圳市华灿天禄电子有限公司		产品名称	PCB 焊接端子 厚度1.2 插板 铜垫片	版本	A
No.	MODIFY CONTENT	MODIFY DATE		ShenzhenhuacantianluELECTRONICS CO., LTD		TITLE	M5 6焊脚 14.5x14.5x8.2mm	REV.	
				材料		PART NO.	HC-RG1256-1414-D520-07	单位	mm
				投影				页次	1/1
				MATERIAL				SHEET	