
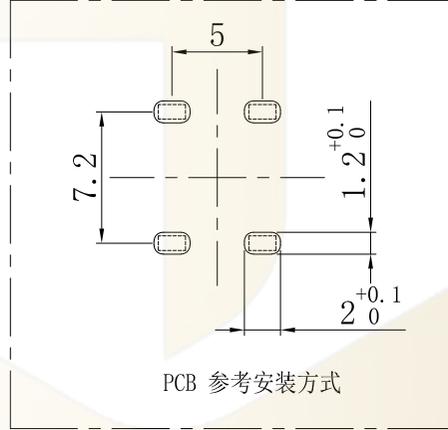



- NOTES:
备注
- Copper, Bright tin plated
黄铜, 镀亮镍
 - Wire screw hole M4
压线螺孔M4
 - Current Rating: 45A
额定电流: 45A
 - There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
 - Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/Pin	Product No.	Material
Pin	0.8mm	M4	0.8mm	1608-8x10mm	Pin	HC-RG0844-0808-D203-07	Copper
Teeth	1.0mm	M4	0.8mm	Pin		Copper
Nut	1.2mm	M4	0.8mm	Pin		Copper
Gasket	1.5mm	M4	0.8mm	Pin		Copper
	2.0mm	M4	0.8mm	Pin		Copper
	2.5mm	M4	0.8mm	Pin		Copper
	3.0mm	M4	0.8mm	Pin		Copper

		GENERAL TOLERANCE	制图	07		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
		DIM TOL	审核			产品名称	PCB焊接端子 厚度0.8 插板 铜垫片	版本	A
		5 or more ±0.35	CHECK			TITLE	M4 4焊脚 8x8x10.2mm	REV.	
		2~5 ±0.25	批准			产品料号	HC-RG0844-0808-D203-07	单位	mm
		0~2 ±0.15	APPROVAL			PART NO.		页次	1/1
序号	变更内容	日期	投影			材料		SHEET	
No.	MODIFY CONTENT	MODIFY DATE	Angle	±3.0°		MATERIAL			