
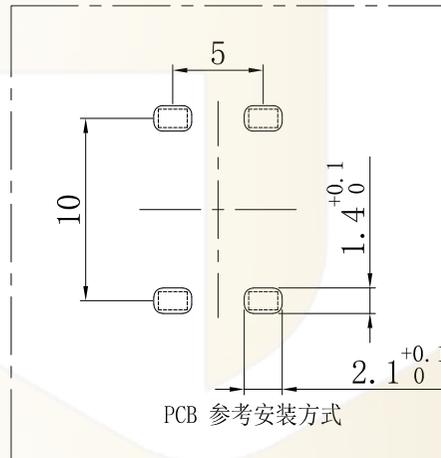



NOTES:

备注

1. Brass or purple copper, Bright tin-plating  
黄铜或紫铜，镀亮锡
2. Wire screw hole M4  
压线螺孔M4
3. Current Rating: 60A  
额定电流:60A
4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形，毛刺等缺陷
5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差



**Ordering Information**

HC - \* \*\* \* - \*\*\*\* - \* \*\* \* - 07

Type Type (型号)	Thickness 0.5~1.0mm 1.0~1.0mm 1.2~1.2mm 1.5~1.5mm 2.0~2.0mm 2.5~2.5mm 3.0~3.0mm	Screw 0#03 (螺牙) 0#04 (螺牙) 0#06 (螺牙) 0#08 (螺牙)	Welding Feet 2#2个 2#2个 6#6个 8#8个	Series 010#08#08mm 1620#16x20mm .....	Pin Screw Flag Dip	Product No. 产品序号	Material Material (黄铜) (紫铜)
----------------------	------------------------------------------------------------------------------------------------------	-----------------------------------------------------------	-------------------------------------------------	------------------------------------------------	-----------------------------	---------------------	--------------------------------------

			GENERAL TOLERANCE	制图	07			深圳市华灿天禄电子有限公司 ShenzhenhuacuantianlueLECTRONICS CO., LTD			
			DIM TOL	审核				产品名称	PCB 焊接端子 厚度1.0 插板 铆垫片	版本	A
			5 or more ±0.35	批准				TITLE	M4 4焊脚 11x9x11.2mm	REV.	
			2~5 ±0.25	比例				产品料号	HC-RG1044-1109-D317-07	单位	mm
			0~2 ±0.15	投影				PART NO.		页次	1/1
序号	变更内容	日期	Angle ±3.0°	Projection				MATERIAL		SHEET	