
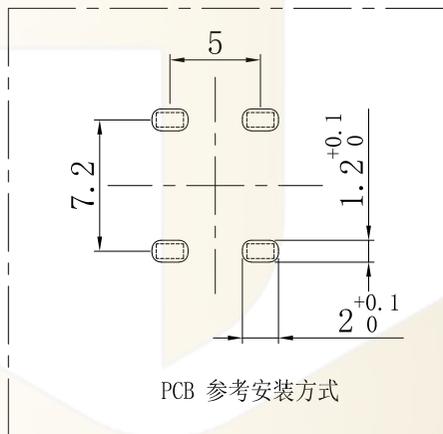



NOTES:

备注

1. Copper, Bright tin plated
黄铜, 镀亮镍
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 45A
额定电流:45A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/Pin	Product No.	Material
Pin (插脚)	0.8±0.05mm	M4 (螺孔)	4个	1620±0.20mm	Pin		Copper (黄铜)
Pin Nut (螺母)	1.0±0.05mm	M4 (螺孔)	2个	Dip		Copper (黄铜)
Pin Gasket (垫片)	1.5±0.05mm	M4 (螺孔)	4个				Copper (黄铜)
	2.0±0.05mm	M4 (螺孔)	6个				Copper (黄铜)
	2.5±0.05mm	M4 (螺孔)	8个				Copper (黄铜)
	3.0±0.05mm	M4 (螺孔)				Copper (黄铜)

		GENREL TOLERANCE		制图	07		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
		DIM	TOL	审核			产品名称	PCB 焊接端子 厚度0.8 插板 铆垫片	版本	A
		5 or more	±0.35	批准			TITLE	M4 4焊脚 8x8x11.2mm	REV.	
1	初版发行	2~5	±0.25	比例			产品料号	HC-RG0844-0808-D204-07	单位	mm
序号	变更内容	0~2	±0.15	投影			PART NO.		页次	1/1
No.	MODIFY CONTENT	Angle	±3.0°	Projection			MATERIAL		SHEET	