
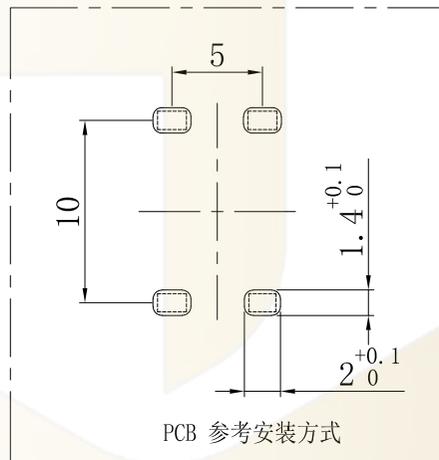



NOTES:

备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 60A
额定电流:60A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/Pin	Product No.	Material
Pin (插脚)	0.5±0.05mm	M3 (螺牙)	2mm	1620=16x20mm	Pin	产品序号	铜 (Copper)
Pin Nut (螺母)	1.0±0.05mm	M3 (螺牙)	2mm	Pin	产品序号	镀锡铜 (Tin-plated Copper)
Pin Gasket (垫片)	1.5±0.05mm	M3 (螺牙)	4mm	Pin	产品序号	铜 (Copper)
Pin Gasket	2.0±0.05mm	M3 (螺牙)	6mm	Pin	产品序号	铜 (Copper)
Pin Gasket	2.5±0.05mm	M3 (螺牙)	8mm	Pin	产品序号	铜 (Copper)
Pin Gasket	3.0±0.05mm	M3 (螺牙)	Pin	产品序号	铜 (Copper)

		GENREL TOLERANCE		制图	07		深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD			
		DIM	TOL	审核						
		5 or more	±0.35	批准			产品名称	PCB 焊接端子 厚度1.0 插板 铆垫片	版本	A
		2~5	±0.25	APPROVAL			TITLE	M4 4焊脚 11x9x10mm	REV.	
		0~2	±0.15	比例			产品料号	HC-RG1044-1109-D325-07	单位	mm
序号	变更内容	日期		SCALE			PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Angle	±3.0°	投影	MATERIAL		SHEET	