
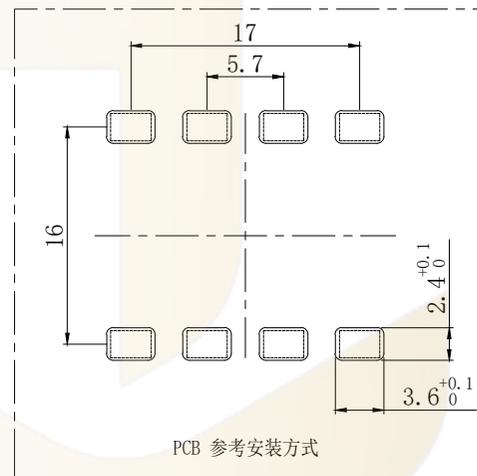
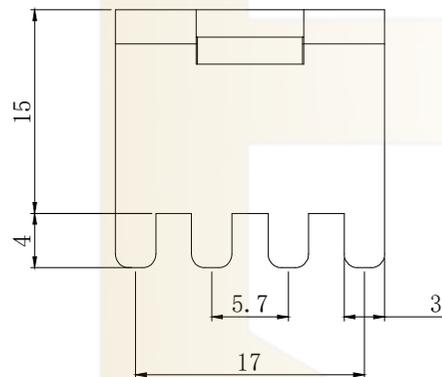


NOTES:

备注

1. Brass or purple copper, Bright tin-plating  
黄铜或紫铜, 镀亮锡
2. Wire screw hole M6  
压线螺孔M6
3. Current Rating: 180A  
额定电流:180A
4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差

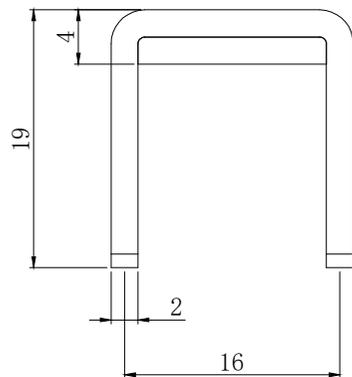

**Ordering Information**

HC - \* \*\* \* - \*\*\*\* - \* \*\*\* \* - 07

Type	Thickness	Screw Thread	Welding Feet	Series	D=H/F	Product No.	Material
8*Full Teeth (插牙)	08-0.8mm	3-63 (螺牙)	0-01 (焊脚)	0808-08.8mm	S=8MT	产品序号	黄铜 (黄铜)
8*Wire Net (网螺母)	10-1.0mm	4-64 (螺牙)	0-02 (焊脚)	1020-10.2mm	FD=Flag		紫铜 (紫铜)
8*Wire Gasket (网垫片)	15-1.5mm	5-65 (螺牙)	0-03 (焊脚)	.....			
	20-2.0mm	6-66 (螺牙)	0-04 (焊脚)				
	25-2.5mm	7-68 (螺牙)	0-05 (焊脚)				
	30-3.0mm	8-70 (螺牙)	0-06 (焊脚)				
	32-3.2mm	.....	.....				

			GENEAL TOLERANCE	制图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核					
			5 or more ±0.35	批准		产品名称	PCB 焊接端子 厚度2.0 插板 铆垫片	版本	A
			2~5 ±0.25	比例		TITLE	M6 8焊脚 18x20x19mm	REV.	
			0~2 ±0.15	SCALE		产品料号	HC-RG2068-1820-D907-07	单位	mm
1	初版发行		Angle ±3.0°	投影		PART NO.		页次	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE				MATERIAL		SHEET	