
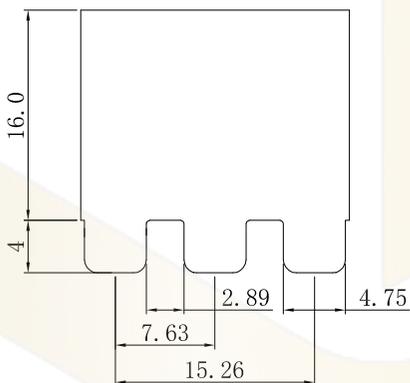


PCB 参考安装方式

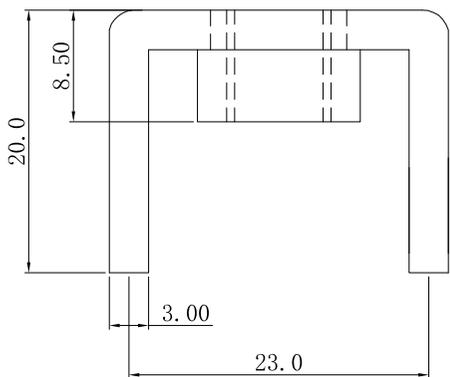

NOTES:

备注

1. Brass or purple copper, Bright tin-plating
黄铜或者紫铜, 镀亮锡
2. Wire screw hole M8
压线螺孔M8
3. Current Rating: 360A
额定电流: 360A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

Ordering Information

HC - * ** * * - * * * * - * * * * * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	DIP	Product No.	Material
插牙 Teeth	0.8mm	2#x2 (螺牙)	4#x1 (螺牙)	0808#x20mm	SMT	产品序号	默认#Copper (紫铜)
螺母 Nut	1.2mm	4#x4 (螺牙)	4#x1 (螺牙)	1616#x20mm	Through Dip		默认#Copper (紫铜)
螺母 Nut	1.5mm	5#x5 (螺牙)	4#x1 (螺牙)			
螺母垫片 Nuts Gasket	2.5mm	6#x6 (螺牙)	4#x1 (螺牙)				
	3.0mm						
	3.5mm						

		GENREL TOLERANCE		制图	07		深圳市华灿天禄电子有限公司 ShenzhenhuacuantianlueLECTRONICS CO., LTD			
		DIM	TOL	审核			产品名称	PCB 焊接端子 厚度3.0 插板 插牙	版本	A
		5 or more	±0.35	CHECK			TITLE	M8 6焊脚 26x20.6x20mm	REV.	
		2~5	±0.25	批准			产品料号	HC-M3086-2620-D1201-07	单位	mm
		0~2	±0.15	APPROVAL			PART NO.		页次	1/1
序号	变更内容	日期	投影			材料				
No.	MODIFY CONTENT	MODIFY DATE	Angle	±3.0°		MATERIAL				