
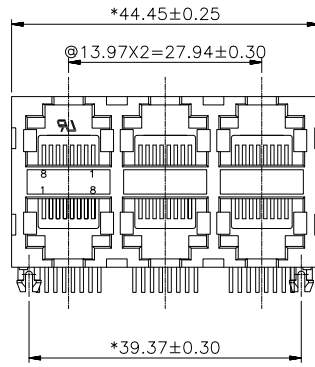
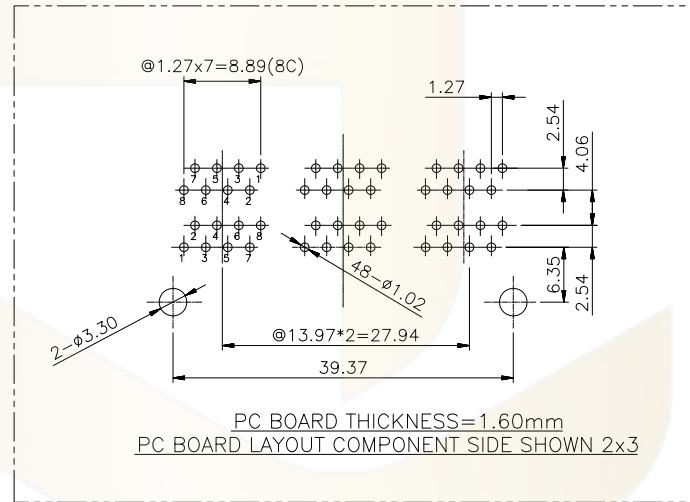


DETAIL "A"

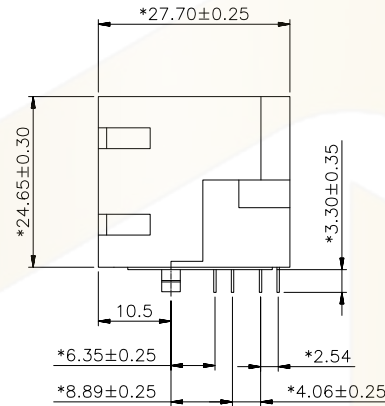

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED PLASTIC.
2. CONTACT MATERIAL : COPPER ALLOY $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION : -40°C TO $+85^{\circ}\text{C}$.
3. RoHS COMPLIANT.

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核				
			X.X	± 0.30	批准	产品名称	网络插座 (无灯全塑)	版本	A
			X.XX	± 0.20	APPROVAL	产品料号	HC-RJ45-059A-2x3-6-12	单位	mm
			X.XXX	± 0.10	SCALE	PART NO.		页次	1/1
序号	变更内容	日期	Angle	$\pm 3.0^{\circ}$	投影	材料		投影	
No.	MODIFY CONTENT	MODIFY DATE			Projection	MATERIAL			