
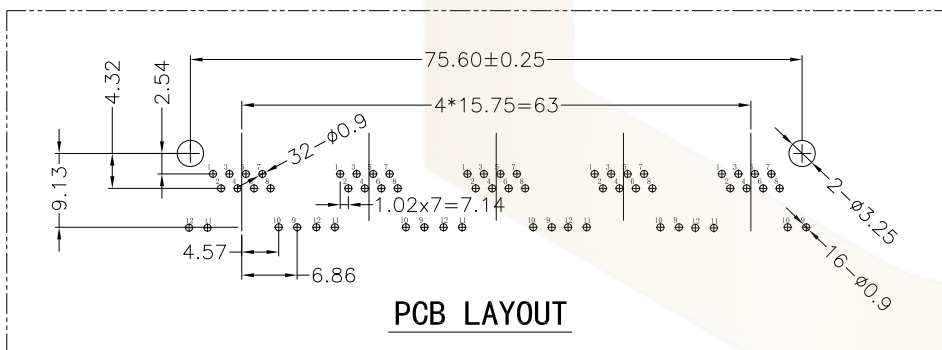
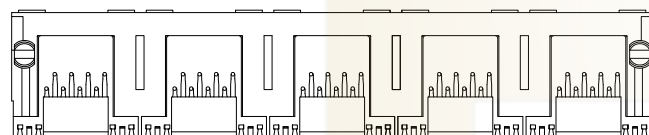


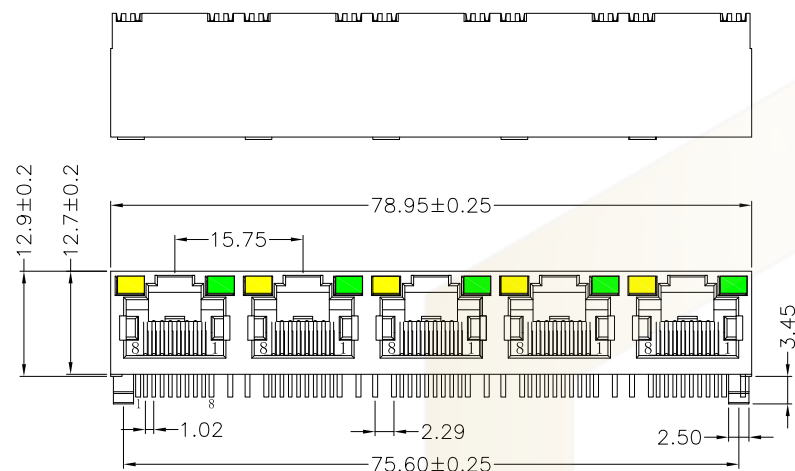

PCB LAYOUT



MATERIAL:
HOUSING:PA46,PBT,PA66,BLACK .
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU*GOLD PLATING

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG .
OPERATING TEMPERATURE: -40 ℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH **

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.6-2.6V
Yellow	585nm	20mA	1.6-2.6V

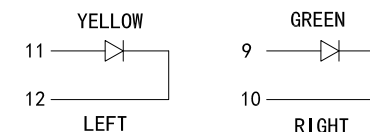

			GENEERL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM	TOL	审 核 CHECK					
			X.X	±0.30	批 准 APPROVAL	产 品 名 称 TITLE	网 络 插 座	版 本 REV.	A	
1	初版发行		X.XX	±0.20	比 例 SCALE	产 品 料 号 PART NO.	HC-RJ45-5JA-5-5-S	单 位 UNITS	mm	
		X.XXX	±0.10							
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1