
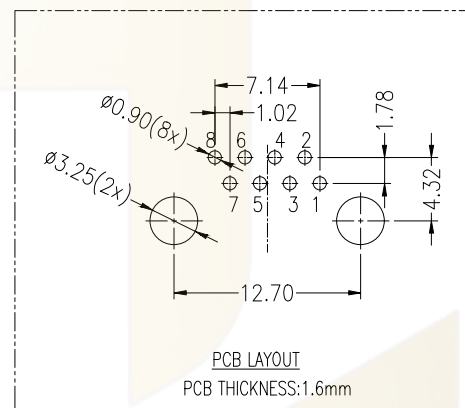
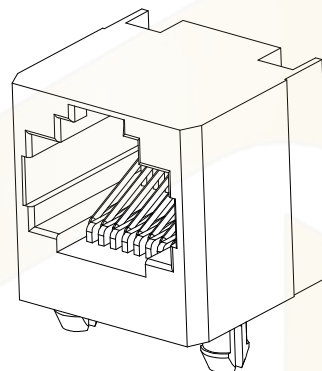
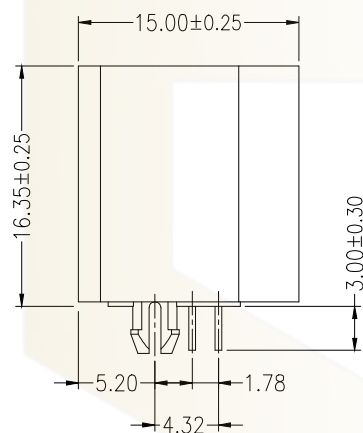
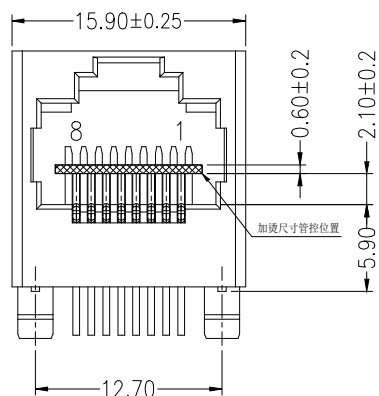




SPECIFICATIONS :

MATERIAL:

- 1.HOUSING MATERIAL: GLASS FILLED PBT(UL94V-0). Colour: Gray
- 2.CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{MM}$.
- 3.PLATING: GOLDFLASH PLATING AND NICKEL PLATING

OVERALL

ELECTRICAL:


- 1.VOLTAGE RATING: 125Vac RMS .
- 2.CURRENT RATING: 1.5AMP .
- 3.CONTACT RESISTANCE: 30m Ω MAX .
- 4.INSULATION RESISTANCE: 500M Ω MIN .
- 5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V

MECHANICAL:

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.INSETION FORCE: 2.2Kgf MAX.
- 3.RETENTION STRENGTH : 7.7Kgf MIN

ENVIRONMENTAL:

- 1.STORAGE TEMPRATURE : -40°C TO 85°C.
- 2.OPERATION TEMPRATURE : -40°C TO 70°C.

			GENEERL TOLERANCE	制 图 DRAWING	04	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X. X ± 0. 30	批 准 APPROVAL		产品名称 TITLE	网络插座 (16H 全塑无灯)	版 本 REV.	A
1	初版发行		X. XX ± 0. 20	比 例 SCALE		产品料号 PART NO.	HC-RJ45-5JB-1-6	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX ± 0. 10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
			Angle ± 3. 0°						