






NOTES:
1. MATERIAL:
   1.1. HOUSING: LCP ,COLOR IS GRAY;
   1.2. CONTACT: PHOSPHOR COPPER (C5191 T=0.30mm) ;
   1.3. SHELL：BRASS (H65 T=0.2mm)；
2. FINISH:
   2.1. CONTACT: PLATED OVER NI,GOLD PLATED G/Fu";
   2.2. SHELL: PLATED OVER NI;
4. ELECTRICAL:
   4.1. VOLTAGE RATING: 125 VAC RMS;
   4.2. CURRENT RATING: 1.5 AMP;
   4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
   4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   4.5. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.;
5. MECHANICAL:
   5.1. MATING/UNMATING FORCE: 22N MAX.;
   5.2. RETENTIION STRENGTH: 50N MIN.;
   5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. ENVIRONMENTAL:
   6.1. STORAGE TEMPERATURE RANGE: −40°C~+85°C;
   6.2. OPERATION TEMPERATURE RANGE: −40°C~+85°C;



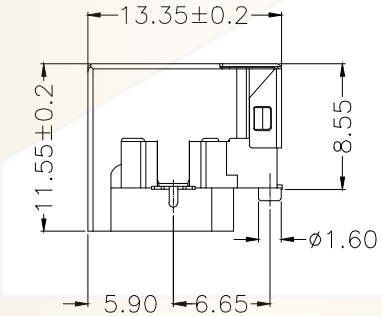

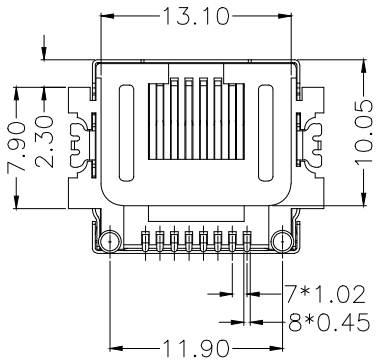

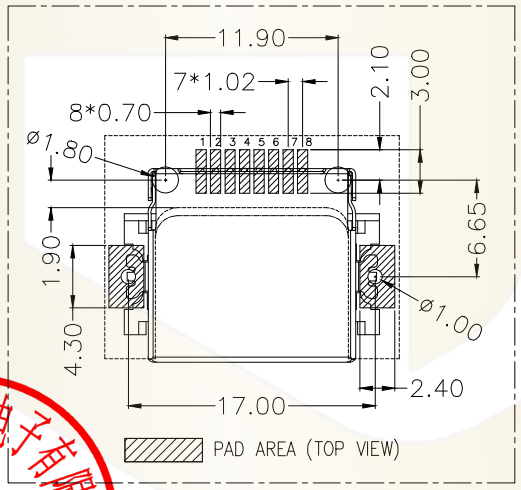



			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	网络插座 RJ沉板（全包铜壳编带）	版 本 REV. A
			X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	HC-RJ45-055-1-4	单 位 UNITS mm
1	初版发行		X.XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET 1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°					

深圳市华灿天禄电子有限公司 工程专用章