





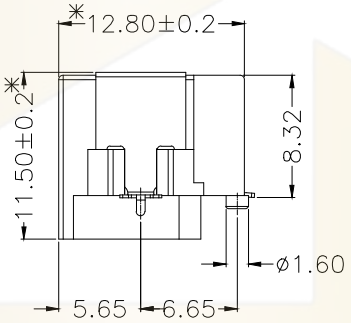

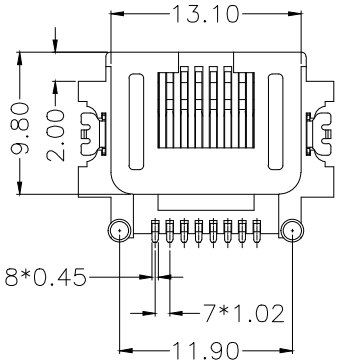

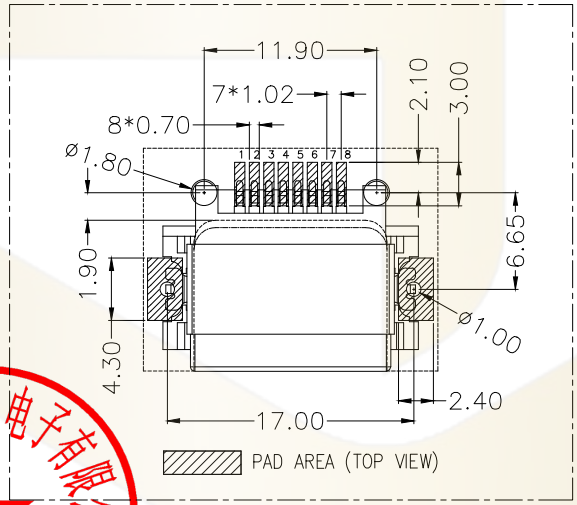



NOTES:

1. MATERIAL:
   - 1.1. HOUSING: LCP ,COLOR IS GRAY;
   - 1.2. CONTACT: PHOSPHOR COPPER (C5191 T=0.30mm);
   - 1.3. SHIELD: STAINLESS STEEL (304 T=0.2mm);
2. FINISH:
   - 2.1. CONTACT: PLATED OVER NI,GOLD PLATED G/Fu";
   - 2.2. SHELL: PLATED OVER NI;
4. ELECTRICAL:
   - 4.1. VOLTAGE RATING: 125 VAC RMS;
   - 4.2. CURRENT RATING: 1.5 AMP;
   - 4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
   - 4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   - 4.5. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.;
5. MECHANICAL:
   - 5.1. MATING/UNMATING FORCE: 22N MAX.;
   - 5.2. RETENTIION STRENGTH: 50N MIN.;
   - 5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. ENVIRONMENTAL:
   - 6.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C;
   - 6.2. OPERATION TEMPERATURE RANGE: -40°C~+85°C;

深圳市华灿天禄电子有限公司 工程专用章

序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE
1	初版发行	

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

GENERL TOLERANCE

制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD	
审 核 CHECK			
批 准 APPROVAL		产品名称 TITLE	网络插座 RJ沉板（腰带式不锈钢吸塑）
比 例 SCALE		产品料号 PART NO.	HC-RJ45-055-1-7
投 影 Projection		材 料 MATERIAL	

版 本 REV.	A
单 位 UNITS	mm
页 次 SHEET	1/1