





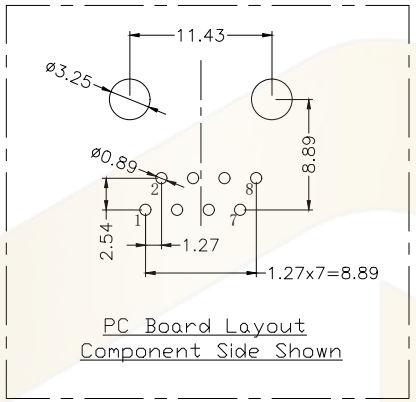



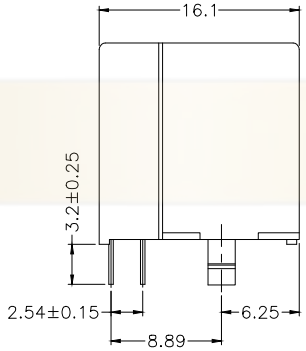



NOTES:
MATERIAL:
1. HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL:PHOSPHOR BRONZE Φ=0.46mm.
3. PLATING :SELECTING GOLD PLATING 3u″~50u″OVER NICKEL
ELECTRICAL:
1. VOLTAGE RATING:125 VAC RMS.
2. CURRENT RATING:1.5 AMP.
3. CONTACT RESISTANCE:30 MILLIOHMS MAX.
4. INSULATION RESISTANCE:500 MEGOHMS MIN @500V DC.
5. DIELECTRIC WITHSTANDING RESISTANCE
:1000V AC RMS 50Hz.1MIN.
MECHANICAL:
1. DURRABILITY::750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER:1 LB MIN.
ENVIRONMENTAL:
1. STORAGE:-40℃ TO +85℃.
2. OPERATION:-40℃ TO +85℃.

深圳市华灿天禄电子有限公司 工程专用章

序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE
1	初版发行	

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

GENERL TOLERANCE

制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD	
审 核 CHECK			
批 准 APPROVAL		产品名称 TITLE	网络插座（无灯全塑） 版 本 REV. A
比 例 SCALE		产品料号 PART NO.	HC-RJ45-5224-1-6 单 位 UNITS mm
投 影 Projection		材 料 MATERIAL	页 次 SHEET 1/1